

from 160 cm. to 300 cm. wide



Ratio 2.35:1

Ratio 16:9

Peculiarity that diversify the **DOUBLE FORMAT TENSIONED** is the side tensioning system which allows to obtain excellent flatness on the whole surface.

TECHNICAL SPECIFICATIONS


- Silent motor system provides a smooth and quiet operation

- Power: **10 Nm**
- Speed: **17 rpm**
- Power supply: **230V / 50 Hz**
- Consumption: **156 W**
- Certification: **IMQ**



⚙ Nm 9
Rpm 26
Faster and quiet
motor
(optional)

- Totally manufactured from aluminium
- Housing dimensions: 230x147 mm. (DxH)
- Housing painted with white epoxy powders (RAL 9010)
- Universal mounting brackets either for ceiling or wall included
- Two on/off switchers
- Power cable located at the **right** side of the screen housing seen from the front
- Flame-retardant projection surfaces – classification M1, M2 and B1
- Side tensioned black borders of 5 cm. (in the narrowest point), black bottom border, black top drop and black dowel bar height 35 mm. depth 20 mm.

HOUSING DIMENSIONS



WALL CEILING BRACKET

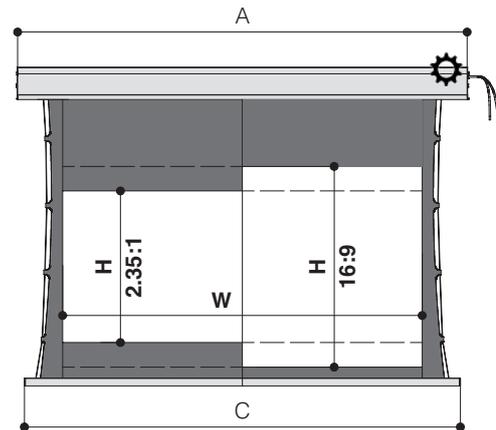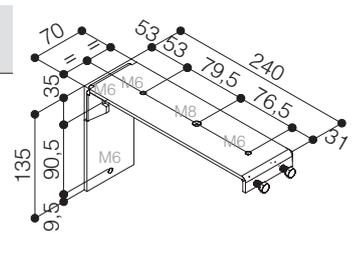

Available in all video formats and bespoke sizes.



n.3
Wall/Ceiling
brackets



n.2
On/off
switchers

INCLUDED



Low voltage
contact
interface



Double RF
Remote control
with two external
receivers

OPTIONAL pag 62-63

DIMENSIONS measures in cm			
16:9 Ratio Viewing area (WxH)	2.35:1 Ratio Viewing area (WxH)	Overall dimensions A - C	Approx. net weight (Kg)
160 x 90	160 x 68	200 - 194	31
180 x 101	180 x 77	220 - 214	35
200 x 112	200 x 85	240 - 234	38
220 x 124	220 x 94	260 - 254	42
250 x 140	250 x 106	290 - 284	49
270 x 152	270 x 115	310 - 304	53
300 x 169	300 x 128	340 - 334	56

PROJECTION CLOTHS	
Front projection surfaces	Gain
Matte White	1.2
Lumi Grey	0.8
Microperforated	1.1
Lumi Grey Microperforated	0.8
Cinesound*	0.7
Bright Contrast 3D*	1.4
Ultra HD	1.2

*Limited in height

Warranty: 5 years on the motor - 24 months on the other components

